
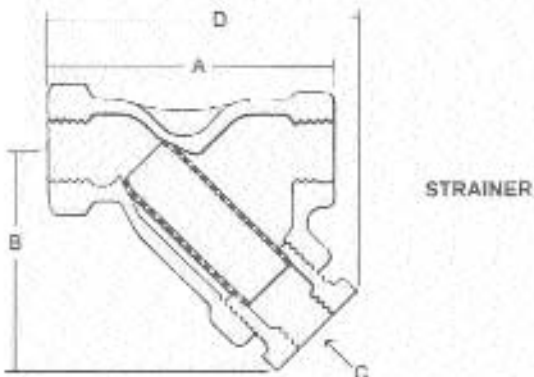


# Specification Sheet

# Industrial Oil Strainers

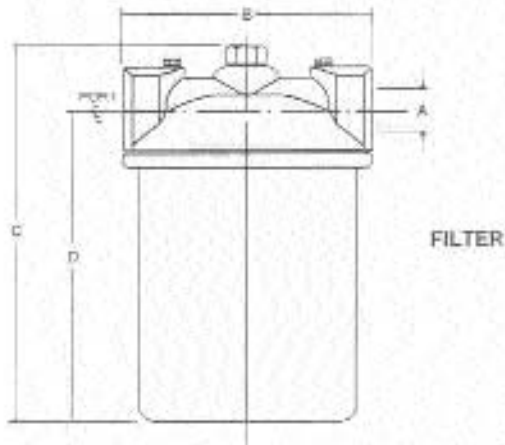

## Specifications

1/4 Inch Cartridge Filter  
Filter p/n MMJ2455F4001

Connections: 1/4" FNPT  
 Filter: 25 micron  
 Recommended Working Pressure: 50 psi  
 Yield Pressure: 200 psi  
 Materials: Cast iron, steel wool  
 Weight: 3.1 lbs.  
 Dimensions: A = 1/4" NPT  
 B = 4-3/8"  
 C = 6-1/4"  
 D = 5-5/16"

Replacement Filter: MMJ2455F4002  
 Service: Light oils only

## 1/4 Inch - 2 Inch "Y" Type Strainer

Limiting Condition: 400°F at 150 psi  
 150°F at 300 psi  
 Materials: Body - Cast Iron  
 Screen - 304 Stainless Steel  
 Connections: Female NPT (FNPT)

### Dimensions & Net Weights for "Y" Type Strainer

| Strainer Size | Mesh (304 SS) | Part Number  | Dimensions (Inches) |     |             |      | Weight (lbs.) | Replacement Element |
|---------------|---------------|--------------|---------------------|-----|-------------|------|---------------|---------------------|
|               |               |              | A                   | B   | C           | D    |               |                     |
| 1/4"          | 200           | MET2455S3007 | 2.9                 | 2.2 | 1/4" FNPT   | 3.0  | 1.1           | MET2455S3008        |
| 1/4"          | 140           | MET2455S3009 | 2.9                 | 2.2 | 1/4" FNPT   | 3.0  | 1.1           | MET2455S3010        |
| 1/2"          | 60            | MET2455S3011 | 3.4                 | 2.7 | 3/8" FNPT   | 3.9  | 1.4           | MET2455S3012        |
| 1/2"          | 40            | MET2455S3013 | 3.4                 | 2.7 | 3/8" FNPT   | 3.9  | 1.4           | MET2455S3014        |
| 3/4"          | 40            | MET2455S3015 | 4.4                 | 3.4 | 1/2" FNPT   | 4.6  | 2.3           | MET2455S3016        |
| 1"            | 40            | MET2455S3017 | 4.9                 | 3.5 | 3/4" FNPT   | 5.0  | 4.3           | MET2455S3018        |
| 1 1/2"        | 40            | MET2455S3019 | 6.4                 | 4.7 | 1 1/4" FNPT | 6.6  | 9.3           | MET2455S3020        |
| 2"            | 40            | MET2455S3021 | 7.5                 | 5.4 | 1 1/2" FNPT | 7.75 | 13.3          | MET2455S3022        |

Note: Thread "C" requires a MNPT valve or MNPT plug (not included).



## **AMCO Water Metering Systems Inc.**

[www.amcowater.com](http://www.amcowater.com)

### United States

AMCO Water Metering Systems  
P. O. Box 1852  
Ocala, FL 34478-1852  
352-732-4670      FAX 352-368-1950  
Outside Florida: 800-874-0890  
Inside Florida: 800-356-6829  
e-mail:  
[watermeters@amcowater.com](mailto:watermeters@amcowater.com)

### Canada

Elster Water  
3450 Harvester Road  
Burlington, Ontario L7N 3W5  
866-703-7582  
905-634-4895  
FAX 905-634-6705  
e-mail:  
[watermeters@ca.elster.com](mailto:watermeters@ca.elster.com)

### Caribbean

AMCO Water Metering Systems  
P. O. Box 225  
Carretera 112 KM 2.3  
Isabela, PR 00662  
787-872-2006  
FAX 787-872-5427  
e-mail:  
[prwatermeters@amcowater.com](mailto:prwatermeters@amcowater.com)

### Mexico

Elster Medidores  
Lago Onega #281  
Col. Modelo Pensil.  
Del. Miguel Hidalgo  
C P 11460  
525 55 203 8002  
FAX 525 55 203 8270  
e-mail:  
[amcowater@prodigy.net.mx](mailto:amcowater@prodigy.net.mx)

---

The company's policy is one of continuous product improvement and the right is reserved to modify the specifications contained herein without notice.

© 2003 AMCO Water Metering Systems Inc. All rights reserved.