

7410 Series

Low flow borosilicate glass tube meter with an economical polycarbonate housing and in-line connections. 65 mm and 150 mm scales available

Description

Metering Tube
Borosilicate Glass

Internal Components
316 Stainless Steel, Black Glass,
Sapphire, Carboloy, Tantalum

Inlet/Outlet Fittings
NPT, Vertical

Fitting Material
Standard: PCTFE
Optional: 316L Stainless Steel, PVDF,
PVC

Elastomers
Not applicable

Options

Certified Calibrations
Conform to ISA RP 16.6

Scales
Can be produced in any volumetric unit



Glass Tube

Performance

Capacities
.56 to 1800 cc/mn – Water
54 to 70000 cc/mn – Air

Scale
65 mm, 150 mm
Direct reading

Accuracy
± 6% of Full Scale Flow, 65 mm
± 4% of Full Scale Flow, 150 mm


Turndown
10:1 to 12.5:1 unless otherwise
indicated

Repeatability
1%

Max Temperature
PCTFE Fittings – 110° F (43° C)
PVC Fittings – 110° F (43° C)
PVDF Fittings – 110° F (43° C)
316L SS Fittings – 110° F (43° C)

Max Pressure
100 psig

Ambient Temperature
33° F to 125° F (1° C to 52° C)

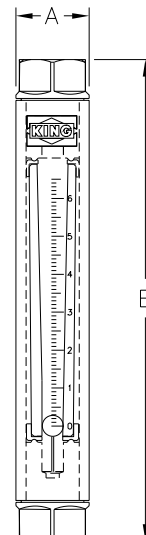

Dimensions (Inches)

Detail Letter	Scale length	
	65mm	150mm
A	.875	.875
B	5.675	10.00

Connection Size

3/8" FNPT

7410 Series

Glass Tube

Specifications:

65MM Scale Flow Ranges								150 MM Scale Flow Ranges							
Tube Number	Float Material	Air (STP)			Water (70°F)			Tube Number	Float Material	Air (STP)			Water (70°F)		
		CC/MIN	SCFH	SLPH	CC/MIN	GPH	LPH			CC/MIN	SCFH	SLPH	CC/MIN	GPH	
1-02-G-021	Glass	66	.14	4.0	0.72	.011	.042	1-03-G-022	Glass	54	.114	3.2	.56	.0088	.033
	Sapphire	105	.22	6.2	1.3	.021	.078		Sapphire	82	.175	4.9	1.04	.0160	.062
	Stainless Steel	200	.42	12.0	3.3	.052	.190		Stainless Steel	160	.340	9.8	2.25	.0350	.135
	Carboloy	340	.70	20.0	7.0	.110	.420		Carboloy	280	.580	16.5	5.00	.0780	.300
	*Tantalum	350	.74	21.0	7.8	.125	.460		*Tantalum	300	.620	17.5	5.20	.0840	.320
1-03-G-041	Glass	76	.16	4.6	1.15	.018	.068	1-04-G-042	Glass	106	.225	6.4	1.24	.0195	.074
	Sapphire	120	.25	7.2	2.10	.032	.125		Sapphire	165	.35	10.0	2.35	.0380	.145
	Stainless Steel	230	.50	14.0	4.20	.068	.260		Stainless Steel	320	.68	19.0	5.60	.0900	.340
	Carboloy	400	.85	24.0	9.00	.145	.560		Carboloy	540	1.14	32.0	12.4	.1950	.740
	*Tantalum	440	.90	26.0	10.00	.165	.620		*Tantalum	580	1.24	35.0	13.5	.2100	.820
1-08-G-061	Glass	525	1.1	31	9.0	.14	.54	1-07-G-062	Glass	350	.74	21.0	4.7	.074	.28
	Sapphire	700	1.5	42	15.5	.24	.95		Sapphire	500	1.06	30.0	10.0	.160	.60
	Stainless Steel	1130	2.4	68	29.0	.46	1.70		Stainless Steel	820	1.75	50.0	20.5	.330	1.25
	Carboloy	1600	3.4	95	46.0	.72	2.80		Carboloy	1250	2.60	76.0	34.0	.540	2.05
	*Tantalum	1700	3.6	100	50.0	.78	3.00		*Tantalum	1350	2.90	80.0	36.0	.560	2.15
1-23-G-081	Glass	2000	4.2	120	44	.70	2.6	1-11-G-082	Glass	850	1.8	50.0	16.5	.26	1.0
	Sapphire	2600	5.4	150	68	1.05	4.0		Sapphire	1100	2.3	66.0	27.0	.42	1.6
	Stainless Steel	3800	8.2	230	110	1.70	6.6		Stainless Steel	1600	3.4	100.0	46.0	.72	2.7
	Carboloy	5600	12.0	340	170	2.70	10.5		Carboloy	2300	4.9	140.0	72.0	1.15	4.4
	*Tantalum	6000	13.0	360	180	2.90	11.0		*Tantalum	2450	5.2	155.0	80.0	1.25	4.8
2-14-G-021	Glass	6800	14.5	400	160	2.6	9.5	1-27-G-102	Glass	2150	4.6	130.0	52	.84	3.1
	Sapphire	9200	19.5	540	240	3.8	14.5		Sapphire	2800	6.0	170.0	78	1.24	4.7
	Stainless Steel	13000	28.0	800	400	6.4	24.0		Stainless Steel	4400	9.2	260.0	130	2.05	7.8
	Carboloy	19000	40.0	1100	600	9.5	36.0		Carboloy	6200	13.5	380.0	205	3.20	12.5
	*Tantalum	20000	42.0	1200	640	10.0	38.0		*Tantalum	6750	14.0	400.0	210	3.30	12.5
2-34-G-041	Glass	19000	40.0	1150	520	8.25	31.0	2-09-G-002	Glass	3800	8.2	230.0	86	1.35	5.2
	Sapphire	25000	52.0	1500	740	11.50	44.0		Sapphire	5000	10.6	300.0	130	2.05	7.8
	Stainless Steel	42500	90.0	2550	1200	19.00	72.0		Stainless Steel	7500	16.0	450.0	220	3.40	13.0
	Carboloy	60000	125.0	3600	1700	27.00	105.0		Carboloy	10600	22.5	640.0	330	5.20	20.0
	*Tantalum	70000	145.0	4200	1800	29.00	110.0		*Tantalum	11500	24.0	680.0	360	5.60	21.5
2-17-G-022	Glass	9000	19.0	540.0	215	3.40	13.0	2-32-G-042	Glass	20500	43.0	1220.0	470	7.5	28.0
	Sapphire	11400	24.5	700.0	320	5.00	19.0		Sapphire	26000	56.0	1550.0	700	11.0	42.0
	Stainless Steel	17000	36.0	1000.0	520	8.20	31.0		Stainless Steel	38000	82.0	2300.0	1120	18.0	68.0
	Carboloy	24000	50.0	1450.0	760	12.2	46.0		Carboloy	54000	116.0	3300.0	1650	26.0	100.0
	*Tantalum	25000	54.0	1500.0	820	13.0	49.0		*Tantalum	60000	125.0	3500.0	1750	28.0	106.0

*Extra cost option.

*Extra cost option.

Ordering:

Use the following guide to determine the specific product number you require.



Meter Series

Tube Number

Float Material

Fitting Material

Scale

See Specifications Table

Glass - 1
Sapphire - 2
316 SS - 3
Carboloy - 4
Tantalum - 5

PCTFE - 1
316L SS - 2
PVC - 3
PVDF - 7

Millimeter - 1
GPH Water@70°F - 2
LPH Water@70°F - 3
CC/MIN Water@STP - 4
SCFH Air@STP - 5
SLPH Air@STP - 6
SCC/MIN Air@STP - 7
Non standard - 8

Example: 74A - 102G021 - 3 - 2 - 2