

3500/6000 PSI Test Kits

For Phosphate Ester Fluids

- Direct reading
- Install in any position
- 360° Rotatable Guard/Scale
- Easier to Read Linear Scale
- No Flow Straighteners or Special Piping Required
- Insensitive to Shock and Vibration
- Good Viscosity Stability
- Temperature up to 240°F
- Accuracy $\pm 2\%$ Full Scale
- Repeatability $\pm 1\%$
- Special Scales Available
- Calibrated for 1.18 S.G.

SPECIFICATIONS:

MATERIALS:

2024 - T351 Anodized aluminum body, piston and cone

C360 Brass body, piston and cone

T303 Stainless body, 2024 - T351 Anodized aluminum piston and cone

COMMON PARTS:
Retaining Ring: SAE 1070/1090 Carbon steel
Spider Plate: T316 SS
Retaining Spring: SAE 1070/1090 Carbon steel
Spring: T302 SS
Indicator and Internal Magnet: PPS / Ceramic
Fasteners: T303 SS
Guard Seal / Bumper: EPR
Pressure Seals: EPR
Scale Support: 6063-T6 Aluminum
Guard: Nylon
End Caps: Nylon ST

THREADS: SAE J1926/1, NPTF ANSI B2.2, BSPP ISO1179

TEMPERATURE RANGE: -20 to 240°F (-29 to 116°C)

PRESSURE RATING:

Aluminum / Brass Operating: 3,500 psi/241 bar max., with a 3:1 safety factor.

Fatigue Rating: per NFPA T2.6.1R1-1991, (for details see page 7)

Stainless Steel Operating: 6,000 psi/414 bar max., (5,000 psi/345 bar max. for 3/4 to 1-1/2" series) with a 3:1 safety factor.

Fatigue Rating: per NFPA T2.6.1R1-1991, (for details see page 7)

PRESSURE DROP: See Ordering Information Table, page 18. For detailed differential pressure charts, see page 52.

ACCURACY: $\pm 2\%$ of full scale reading

REPEATABILITY: $\pm 1\%$


PRESSURE GAUGE: Glycerin dampened, 0 - 3,500 psi / 0 - 240 bar pressure range. Available in aluminum and brass test kits.
 Glycerin dampened, 0 - 6,000 psi / 0 - 400 bar pressure range. Available on stainless steel test kits.

LOAD VALVE: 1/2", 3/4" and 1" series - needle valve; 1-1/4" and 1-1/2" series ball valve. Produce ΔP up to 3,500 psi/241 bar PSID and 6,000 psi/414 bar PSID.

DIMENSIONS:

| | A | B | B ₁ | C | D | E | F |
|-------------------|----------------|----------------|----------------|---------------|---------------|----------------|---------------|
| NOMINAL PORT SIZE | LENGTH in (mm) | LENGTH in (mm) | LENGTH in (mm) | WIDTH in (mm) | DEPTH in (mm) | OFFSET in (mm) | FLATS in (mm) |
| 1/2 (SAE10) | 6.6 (168) | 10.3 (262) | 2.07 (53) | 2.40 (61) | 1.04 (26) | 1.25 (32) | |
| 3/4 (SAE 12) | 7.2 (183) | 11.3 (287) | 2.48 (63) | 2.85 (72) | 1.24 (32) | 1.50 (38) | |
| 1 (SAE 16) | 7.2 (183) | 11.3 (287) | 2.48 (63) | 2.85 (72) | 1.24 (32) | 1.50 (38) | |
| 1-1/4 (SAE 20) | 12.2 (310) | 20.5 (521) | 4.12 (105) | 4.72 (120) | 2.06 (52) | 2.75 (70) | |
| 1-1/2 (SAE 24) | 12.2 (310) | 20.5 (521) | 4.12 (105) | 4.72 (120) | 2.06 (52) | 2.75 (70) | |

NOTE: Weights for all sizes can be found on page 57.
 SAE and BSPP Test Kits include inlet adapter.

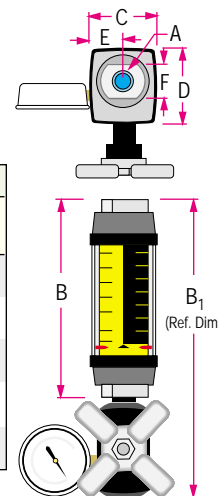


3500/6000 PSI Test Kits

For Phosphate Ester Fluids


ORDERING INFORMATION:

| NOMINAL PORT SIZE | FLOW RANGE | | PRESSURE DROP | | | MODEL NUMBER <i>(see example below*)</i> | | | MATERIAL | | | OPTIONS |
|-------------------|------------|------------|--------------------|---------------------|-----------------------------|--|-------------------|-----------------|-------------------|----------------|-----------|----------------|
| | GPM | LPM | 50% FLOW PSI (BAR) | 100% FLOW PSI (BAR) | REVERSE 100% FLOW PSI (BAR) | SAE | NPTF | BSP | ALUMINUM 3500 PSI | BRASS 3500 PSI | STAINLESS | REVERSE FLOW |
| 1/2 SAE 10 | 0.1 - 1.0 | 0.5 - 3.75 | 3.0 (.21) | 4.75 (.33) | 7.2 (.50) | H694 * - 001 - TK | H695 * - 001 - TK | H696 * 001 - TK | A | B | S | 6000 PSI RT |
| | 0.2 - 2.0 | 1 - 7.5 | 5.0 (.34) | 9.0 (.62) | 15.6 (1.1) | H694 * - 002 - TK | H695 * - 002 - TK | H696 * 002 - TK | | | | |
| | 0.5 - 5.0 | 2 - 19 | 10.0 (.69) | 26.0 (1.8) | 24.8 (1.7) | H694 * - 005 - TK | H695 * - 005 - TK | H696 * 005 - TK | | | | |
| | 1 - 10 | 5 - 38 | 24.0 (1.7) | 71.5 (4.9) | 85 (5.9) | H694 * - 010 - TK | H695 * - 010 - TK | H696 * 010 - TK | | | | |
| | 1 - 15 | 4 - 56 | 39.0 (2.7) | 155 (10.7) | 210 (14.5) | H694 * - 015 - TK | H695 * - 015 - TK | H696 * 015 - TK | | | | |
| | | | | | | | | | | | | |
| 3/4 SAE 12 | 0.2 - 2.0 | 1 - 7.5 | 1.5 (1.0) | 3.0 (.21) | 3.9 (.27) | H794 * - 002 - TK | H795 * - 002 - TK | H796 * 002 - TK | A | B | S | 5000 PSI RT |
| | 0.5 - 5.0 | 2 - 19 | 4.0 (.28) | 6.5 (.45) | 8.3 (.57) | H794 * - 005 - TK | H795 * - 005 - TK | H796 * 005 - TK | | | | |
| | 1 - 10 | 5 - 38 | 6.5 (.45) | 16.0 (1.1) | 15.8 (1.1) | H794 * - 010 - TK | H795 * - 010 - TK | H796 * 010 - TK | | | | |
| | 2 - 20 | 10 - 76 | 11.0 (.76) | 26.0 (1.8) | 35.0 (2.4) | H794 * - 020 - TK | H795 * - 020 - TK | H796 * 020 - TK | | | | |
| | 3 - 30 | 10 - 115 | 18.0 (1.2) | 47.5 (3.3) | 76.1 (5.2) | H794 * - 030 - TK | H795 * - 030 - TK | H796 * 030 - TK | | | | |
| | | | | | | | | | | | | |
| 1 SAE 16 | 0.2 - 2.0 | 1 - 7.5 | 1.5 (1.0) | 3.0 (.21) | 3.9 (.27) | H764 * - 002 - TK | H765 * - 002 - TK | H766 * 002 - TK | A | B | S | 5000 PSI RT |
| | 0.5 - 5.0 | 2 - 19 | 4.0 (.28) | 6.5 (.45) | 8.3 (.57) | H764 * - 005 - TK | H765 * - 005 - TK | H766 * 005 - TK | | | | |
| | 1 - 10 | 5 - 38 | 6.5 (.45) | 16.0 (1.1) | 15.8 (1.1) | H764 * - 010 - TK | H765 * - 010 - TK | H766 * 010 - TK | | | | |
| | 2 - 20 | 10 - 76 | 11.0 (.76) | 26.0 (1.8) | 35.0 (2.4) | H764 * - 020 - TK | H765 * - 020 - TK | H766 * 020 - TK | | | | |
| | 3 - 30 | 10 - 115 | 18.0 (1.2) | 47.5 (3.3) | 76.1 (5.2) | H764 * - 030 - TK | H765 * - 030 - TK | H766 * 030 - TK | | | | |
| | 4 - 40 | 15 - 150 | 26.0 (1.8) | 75.0 (5.2) | 139 (9.6) | H764 * - 040 - TK | H765 * - 040 - TK | H766 * 040 - TK | | | | |
| 5 - 50 | 20 - 190 | 63.5 (4.4) | 114 (7.9) | 230 (15.9) | H764 * - 050 - TK | H765 * - 050 - TK | H766 * 050 - TK | | | | | |
| 1-1/4 SAE 20 | 3 - 30 | 10 - 110 | 3.4 (.23) | 7.8 (.54) | 5.6 (.39) | H894 * - 030 - TK | H895 * - 030 - TK | H896 * 030 - TK | A | B | S | 5000 PSI RT |
| | 5 - 50 | 20 - 190 | 4.3 (.30) | 8.8 (6.1) | 14.3 (.99) | H894 * - 050 - TK | H895 * - 050 - TK | H896 * 050 - TK | | | | |
| | 10 - 75 | 40 - 280 | 6.3 (.43) | 14.3 (9.9) | 35.7 (2.5) | H894 * - 075 - TK | H895 * - 075 - TK | H896 * 075 - TK | | | | |
| | 10 - 100 | 50 - 380 | 8.3 (.57) | 21.3 (1.5) | 45.3 (3.1) | H894 * - 100 - TK | H895 * - 100 - TK | H896 * 100 - TK | | | | |
| | 10 - 150 | 50 - 560 | 14.3 (.99) | 41.3 (2.8) | 124 (8.6) | H894 * - 150 - TK | H895 * - 150 - TK | H896 * 150 - TK | | | | |
| | | | | | | | | | | | | |
| 1-1/2 SAE 24 | 3 - 30 | 10 - 110 | 3.4 (.23) | 7.8 (.54) | 5.6 (.39) | H864 * - 030 - TK | H865 * - 030 - TK | H866 * 030 - TK | A | B | S | 5000 PSI RT |
| | 5 - 50 | 20 - 190 | 4.3 (.30) | 8.8 (6.1) | 14.3 (.99) | H864 * - 050 - TK | H865 * - 050 - TK | H866 * 050 - TK | | | | |
| | 10 - 75 | 40 - 280 | 6.3 (.43) | 14.3 (9.9) | 35.7 (2.5) | H864 * - 075 - TK | H865 * - 075 - TK | H866 * 075 - TK | | | | |
| | 10 - 100 | 50 - 380 | 8.3 (.57) | 21.3 (1.5) | 45.3 (3.1) | H864 * - 100 - TK | H865 * - 100 - TK | H866 * 100 - TK | | | | |
| | 10 - 150 | 50 - 560 | 14.3 (.99) | 41.3 (2.8) | 124 (8.6) | H864 * - 150 - TK | H865 * - 150 - TK | H866 * 150 - TK | | | | |
| | | | | | | | | | | | | |


(example) H 795 * A - 030 - RT

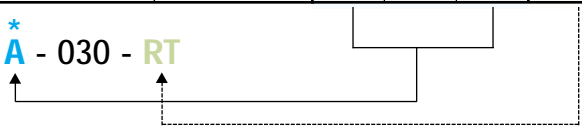

REVERSE FLOW BY-PASS OPTION: Features a two-piece cone that responds to flow in the primary flow direction in the same manner as the standard design. Flow in the reverse direction causes the lower cone shuttle to shift, moving it below the sharp-edged piston orifice. This shift creates a gap which allows the fluid to flow freely in the reverse direction.

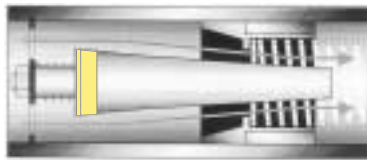

Normal Flow Direction

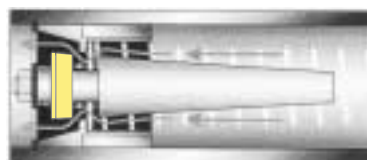

Reverse Flow By-Pass

NOTE: TK suffix represents standard test kit configuration. For reverse flow by-pass test kit, replace TK suffix with RT suffix.

CAUTION: RT option is not available with standard brass flow meters.

PETROLEUM TEST KITS

PAGE 11



WATER-BASED TEST KITS

PAGE 23



FLOW ALERT FLOW SWITCHES

PAGE 39



FLOW TRANSMITTERS

PAGE 41

